


HIPPO


ENTRANCE & TRANSITION AREA RANGE

 **MADE IN THE UK. MADE TO LAST.**

Specification

PRODUCT	Hippo Heavy Contract Fibre Bonded Carpet
FIBRE CONSTRUCTION	90% Polypropylene, 10% Recycled Polyester
WEIGHT	2380gsm
THICKNESS	12mm
ROLL WIDTH	 2 metre and 4 metre, ribbing runs down length of roll
BACKING	Rubber Waffle
COLOUR FASTNESS	Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:X12) 5 Dry Rubbing (BS EN ISO 105:X12) 5
FLAMMABILITY	(BS6307) Methenamine Pill Test - Pass
BS EN 13501	Class Efl
ADHESIVE GUIDE	F. Ball F3 or Bostik Laybond Carpet Adhesive
MAINTENANCE	To achieve maximum life expectancy it is essential to initiate a maintenance schedule from the date of installation. A full guide to cleaning & maintenance is available at: www.heckmondwike-fb.co.uk

PLEASE NOTE: For technical reasons, as with all textile materials, it is not possible to colour match from different batches. Orders that need to colour match should be placed at the same time. Production may, therefore, show variations to the sample card. Heckmondwike reserves the right to change or modify product specifications without giving prior notice.

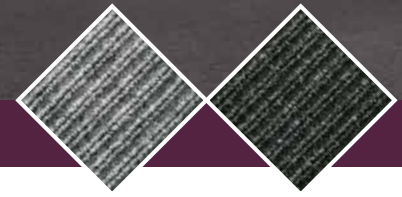

**UK
CA
CE**

EN 14041
Heckmondwike
FB
Liversedge
WF15 7FH

18

Hippo Sheet Fibre
Bonded Tile Floor-
covering
intended for
internal use