

Heritage

DATASHEET



INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for hardwax oiled floors, Refresher for hardwax oiled

See more alternatives and the complete range of accessories @ www.tarkett.com

Product name	Product Code	Page
Heritage - OAK (1-strip)	41007001	3
Heritage - OAK LIME STONE (1-strip)	41007002	4
Heritage - OAK OLD BROWN (1-strip)	41007004	5
Heritage - OAK OLD GREY (1-strip)	41007005	6
Heritage - OAK URBAN GREY (1-strip)	41007007	7
Heritage - OAK (1-strip)	41007009	8
Heritage - OAK BLONDE (1-strip)	41007013	9
Heritage - OAK OLD WHITE (1-strip)	7876128	10

Heritage - OAK (1-strip)

DATASHEET

Product Information	Value
Material code	41007001
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks



Heritage - OAK LIME STONE (1-strip)

DATASHEET


Product Information	Value
Material code	41007002
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	42 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

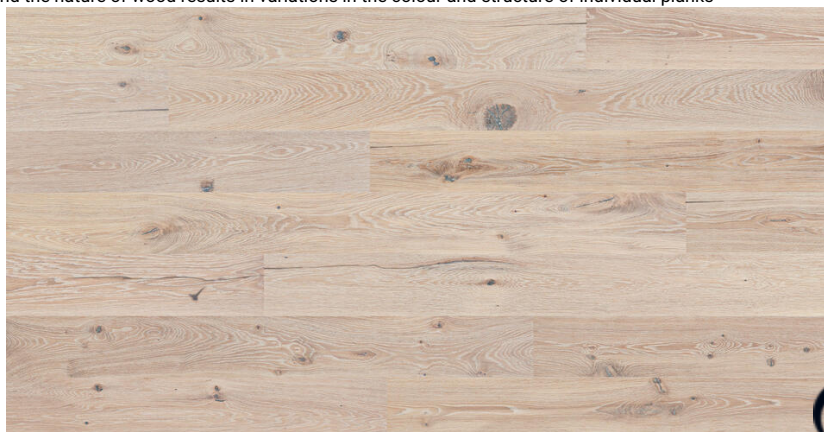

Heritage - OAK OLD BROWN (1-strip)

DATASHEET

Product Information	Value
Material code	41007004
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	11 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks



Heritage - OAK OLD GREY (1-strip)

DATASHEET


Product Information	Value
Material code	41007005
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	21 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

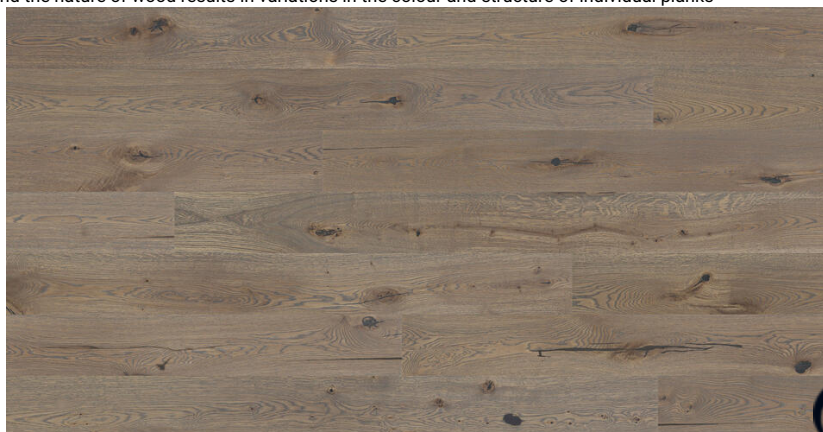

Heritage - OAK URBAN GREY (1-strip)

DATASHEET

Product Information	Value
Material code	41007007
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	43 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks



Heritage - OAK (1-strip)

DATASHEET

Product Information	Value
Material code	41007009
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m ²
Surface per pallet	79,8 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks



Heritage - OAK BLONDE (1-strip)

DATASHEET


Product Information	Value
Material code	41007013
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m ²
Surface per pallet	79,8 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	36 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

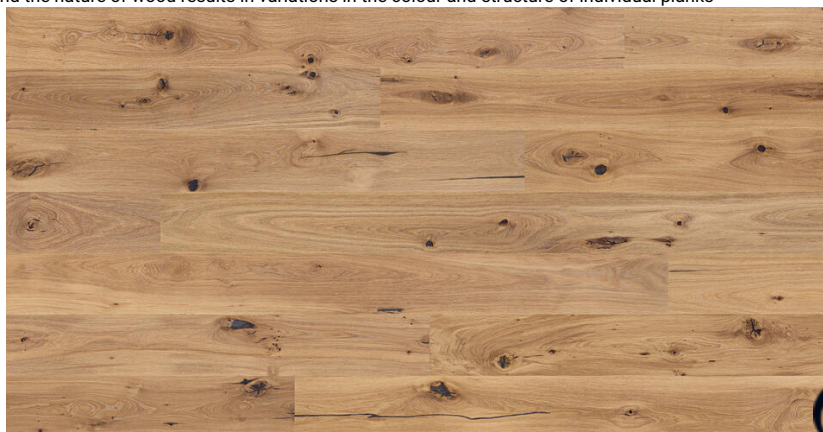

Heritage - OAK OLD WHITE (1-strip)

DATASHEET

Product Information	Value
Material code	7876128
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Hardwax Oil
Surface effect	Deep brushed
Bevelled edges	2-side handmade minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Expressive
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	51 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

