

Segno

DATASHEET



INSTALLATION

- Installation method: glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Adhesive as recommended in installation instruction
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for hardwax oiled floors, Refresher for hardwax oiled floors

See more alternatives and the complete range of accessories @ www.tarkett.com

Product name	Product Code	Page
Segno - OAK LIME STONE (Herringbone)	41020031	3
Segno - OAK LIME STONE (Herringbone)	41020032	4
Segno - OAK BLONDE (Herringbone)	41020033	5
Segno - OAK BLONDE (Herringbone)	41020034	6
Segno - OAK (Herringbone)	41020035	7
Segno - OAK (Herringbone)	41020036	8
Segno - OAK OLD GREY (Herringbone)	41020037	9
Segno - OAK OLD GREY (Herringbone)	41020038	10
Segno - OAK OLD BROWN (Herringbone)	41020039	11
Segno - OAK OLD BROWN (Herringbone)	41020040	12

Segno - OAK LIME STONE (Herringbone)

DATASHEET


Product Information	Value
Material code	41020031
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	45 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

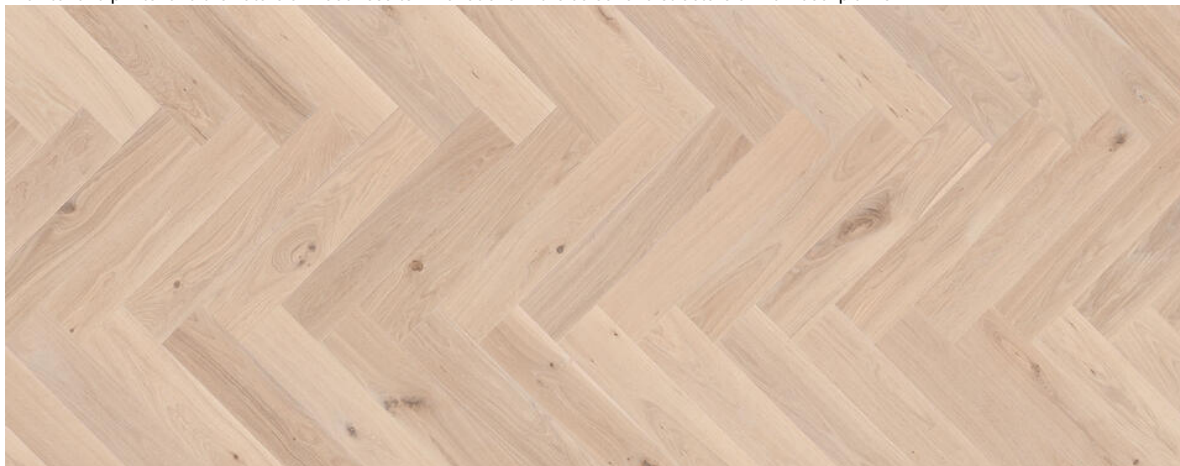

Segno - OAK LIME STONE (Herringbone)

DATASHEET


Product Information	Value
Material code	41020032
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	45 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

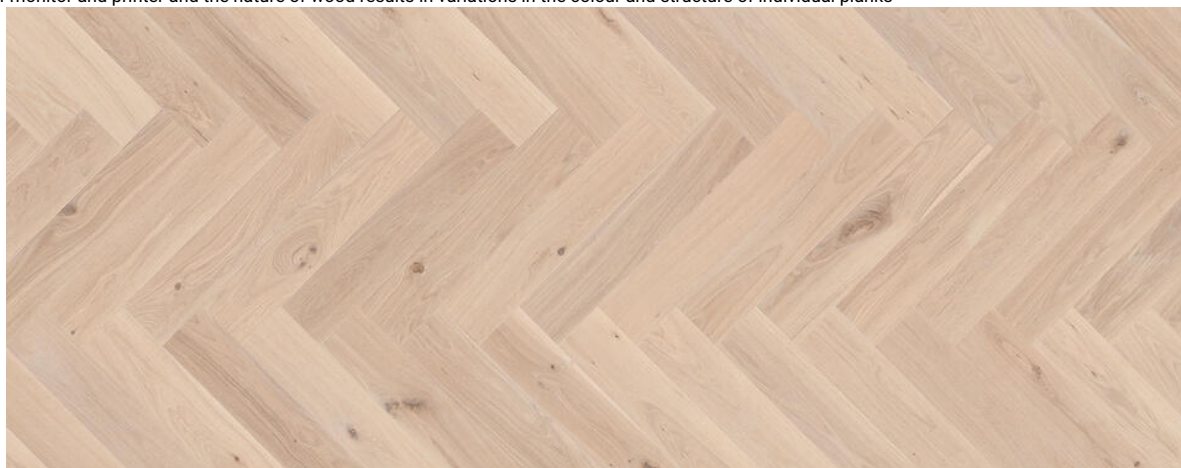

Segno - OAK BLONDE (Herringbone)

DATASHEET


Product Information	Value
Material code	41020033
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	38 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

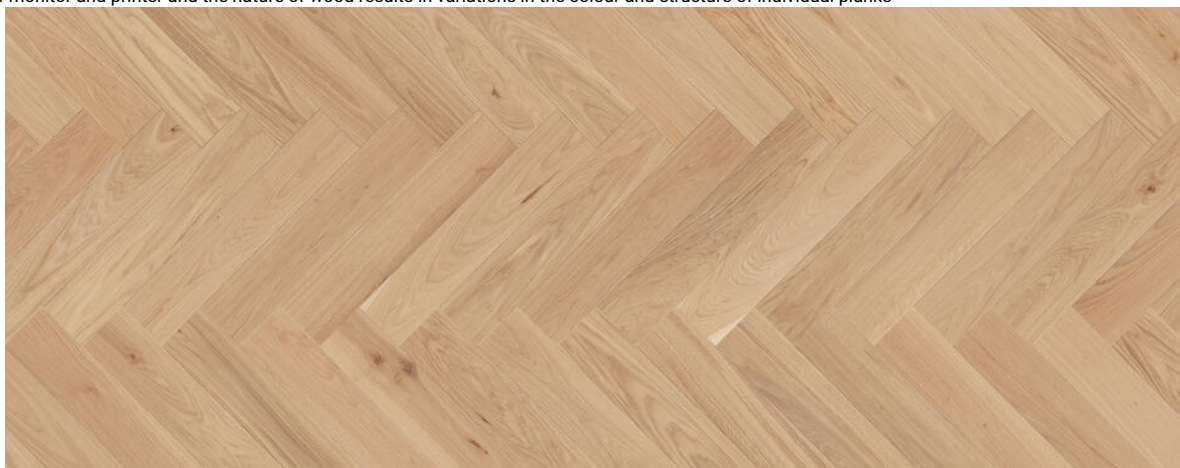

Segno - OAK BLONDE (Herringbone)

DATASHEET

Product Information	Value
Material code	41020034
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	38 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks



Segno - OAK (Herringbone)

DATASHEET


Product Information	Value
Material code	41020035
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	33 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

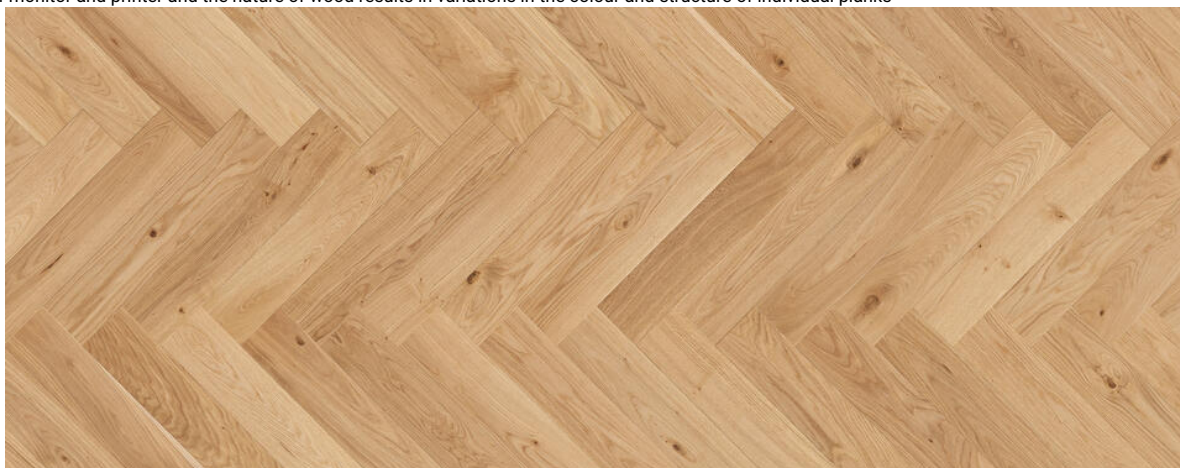

Segno - OAK (Herringbone)

DATASHEET


Product Information	Value
Material code	41020036
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	33 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

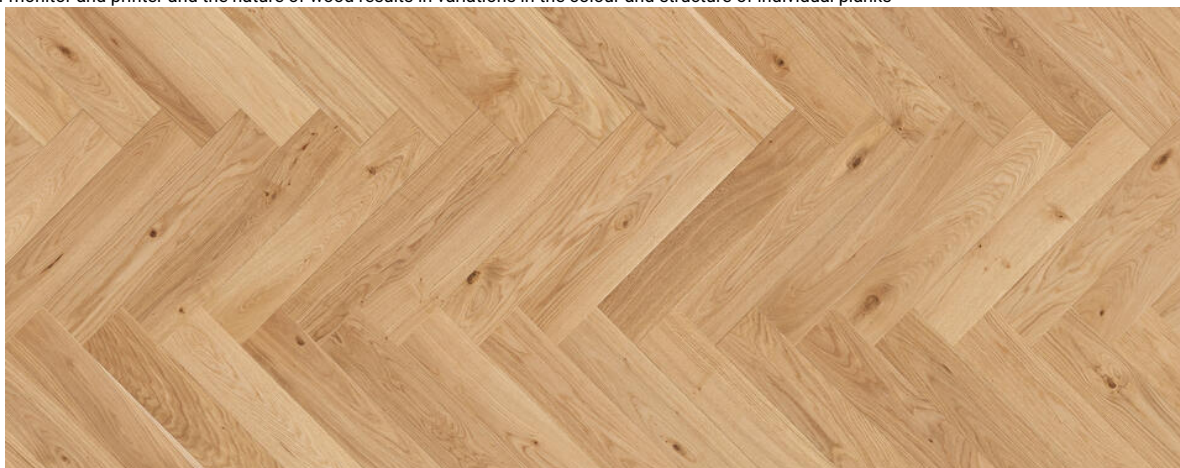

Segno - OAK OLD GREY (Herringbone)

DATASHEET


Product Information	Value
Material code	41020037
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	25 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

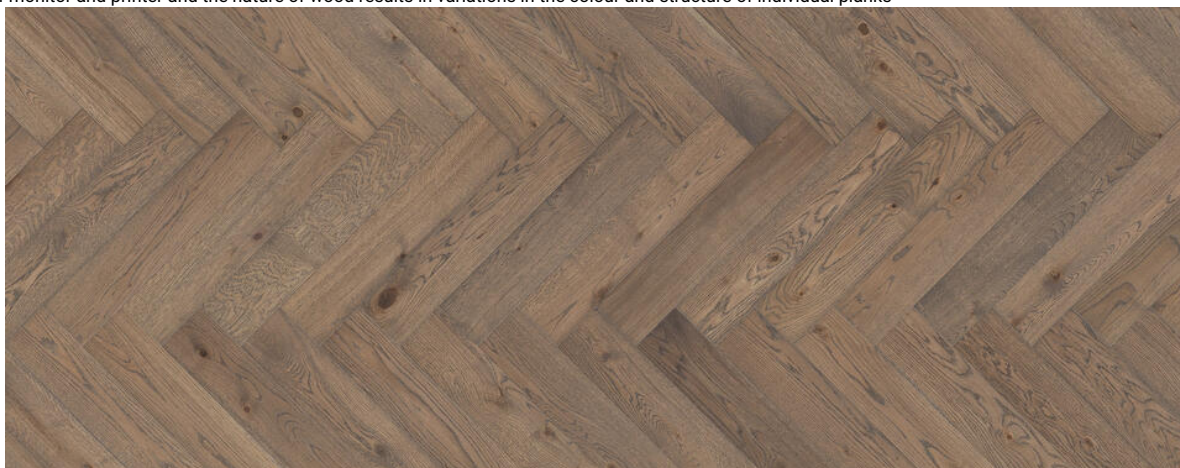

Segno - OAK OLD GREY (Herringbone)

DATASHEET


Product Information	Value
Material code	41020038
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	25 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

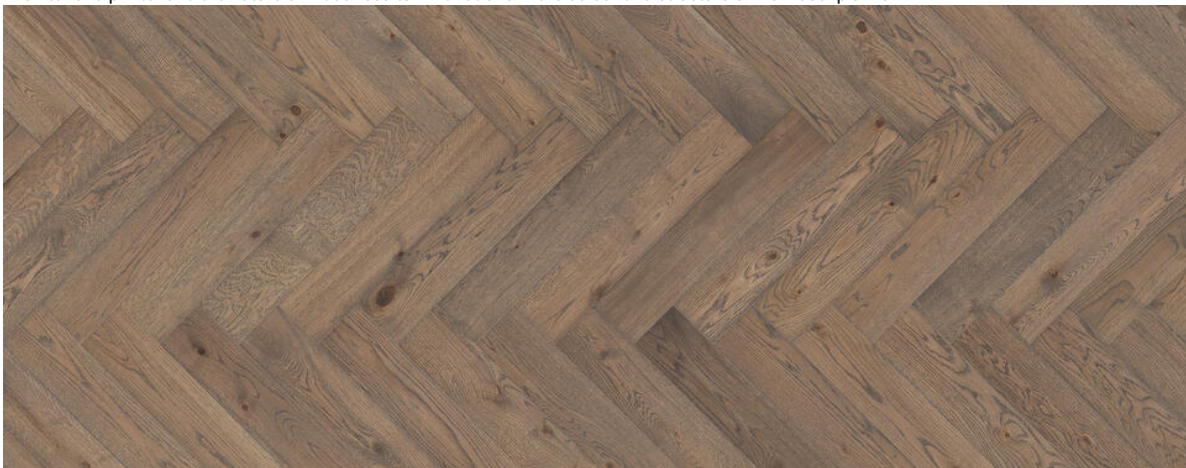

Segno - OAK OLD BROWN (Herringbone)

DATASHEET


Product Information	Value
Material code	41020039
Format	Plank 600x120mm Left
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	12 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

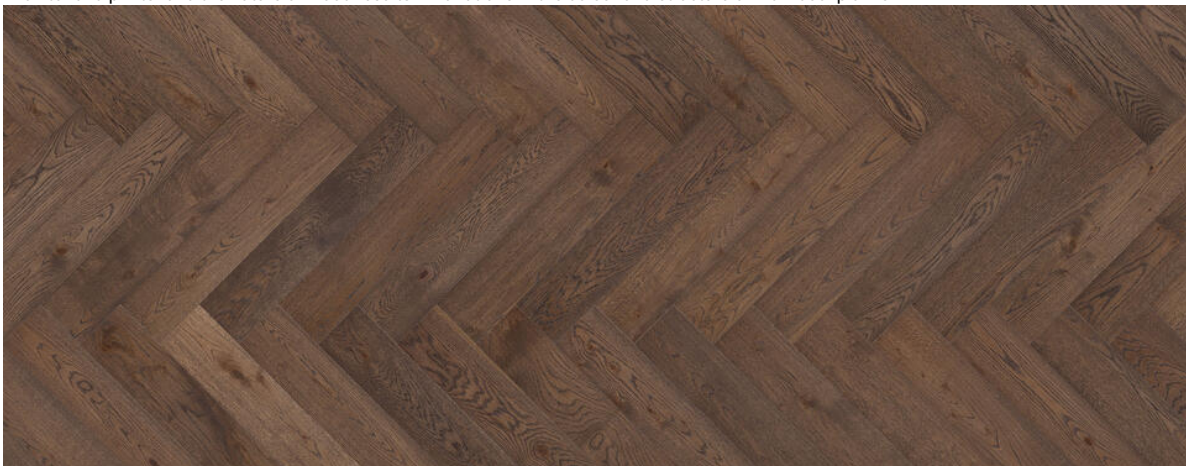

Segno - OAK OLD BROWN (Herringbone)

DATASHEET

Product Information	Value
Material code	41020040
Format	Plank 600x120mm Right
Pattern	(Herringbone)
Surface treatment	Proteco Hardwax Oil
Surface effect	Brushed
Bevelled edges	4-side minibevel
Wear layer thickness	3,5 mm
Total thickness	11 mm
Items per box	32
Surface per box	2,304 m ²
Surface per pallet	69,12 m ²
Net weight	7,16 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0144
LRV - overall average / Standard deviation	12 / 1

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Value	Norm
Reaction to fire	Cfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.17	EN 12664 / EN 14342:2013
Slip Resistance	Low risk of slip	BS 7976-2
Construction	Plywood Support 2-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks

