

# Connect 8 XL.

## Technical data.

BERRY  ALLOC

11/2023

|                       | contains | m <sup>2</sup>        | ft <sup>2</sup>         | weight  |
|-----------------------|----------|-----------------------|-------------------------|---------|
| 1 pack Connect 8 XL   | 6 planks | 2,95 m <sup>2</sup>   | 31.72 ft <sup>2</sup>   | 21,1 kg |
| 1 pallet Connect 8 XL | 54 packs | 159,14 m <sup>2</sup> | 1712.92 ft <sup>2</sup> | 1159 kg |

### product specifications

|   |                           |
|---|---------------------------|
| Dimensions  | 2038 x 241 mm             |
| Total thickness                                     | 8 mm                      |
| Bevels  | 4                         |
| Loc System  | PentaLoc                  |
| Level of use according to European standard EN10874 | 23 heavy domestic use     |
|   | 32 general commercial use |
| Residential warranty                                | lifetime                  |
| Commercial warranty                                 | 5 years                   |

Warranty conditions on [www.berryalloc.com](http://www.berryalloc.com).




### composition

|               |  |
|---------------|--|
| Surface layer | Direct laminated paper, impregnated with melamine resin. |
| Substrate     | Moisture resistant High Density Fiberboard (HDF).        |
| Backing       | Direct laminated paper, impregnated with melamine resin. |

### test results

|   |           |   |
|---|-----------|---|
| Abrasion resistance   | EN13329   | AC4 (IP $\geq$ 4000)  |
| Impact resistance   | EN13329   | small ball : $\geq$ 35 mm - big ball : $\geq$ 750 mm  |
| Thickness swelling  | ISO24336  | 12% (requirement $\leq$ 18%)  |
| Fire resistance   | EN13501-1 | Cfl-S1  |
| Formaldehyde emission   | EN717-1   | E1  |
| Slip resistance   | EN13893   | DS  |
| Density   | EN323     | 900 kg/m <sup>3</sup>   |
| Resistance to staining  | EN438     | 5 (groups 1+2) ; 4 (group 3)  |
| Effect of a furniture leg                                       | EN16581   | no damage (foot type 0)   |
| Effect of a castor chair  | EN425     | no damage with type W wheels  |
| Thermal resistance in combination with underlay Excellence Plus | ISO 8302  | 0,08 m <sup>2</sup> K/W – Suitable for floor heating/cooling. Detailed instructions on <a href="http://www.berryalloc.com">www.berryalloc.com</a> . |


laminatE.



[www.berryalloc.com](http://www.berryalloc.com)

11/2023

### What is a laminate floor made of?

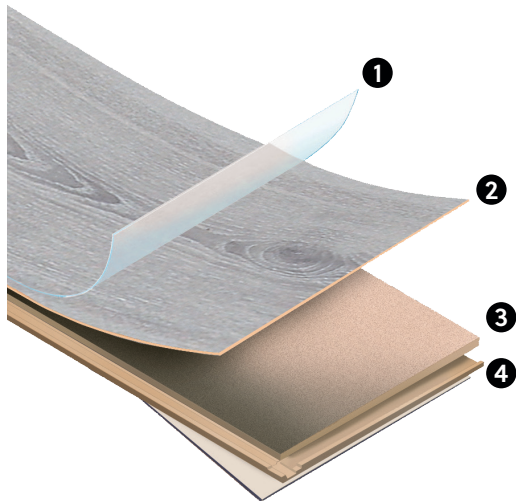

- ❶ An **overlay** that determines the strength and resistance of your floor
- ❷ A **decor paper** for the design
- ❸ A **high-density fibreboard (HDF)** core
- ❹ A **counterbalance** to stabilise and protect the HDF core